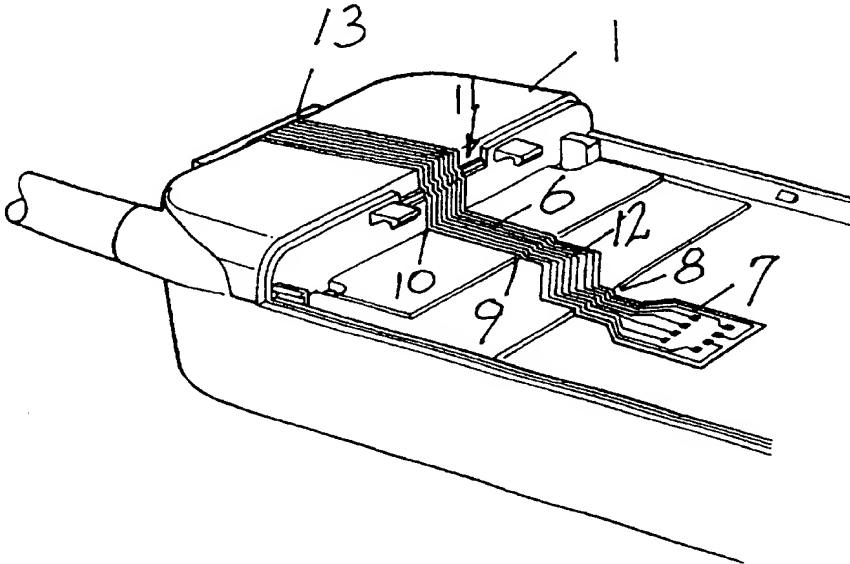


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>H04B 7/26, H04M 15/00, H04Q 7/20,</b> <b>7/32, 7/38</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 97/26719</b> <b>(43) International Publication Date:</b> 24 July 1997 (24.07.97)
<b>(21) International Application Number:</b> PCT/AU96/00802 <b>(22) International Filing Date:</b> 13 December 1996 (13.12.96) <b>(30) Priority Data:</b> PN 7551 15 January 1996 (15.01.96) AU <b>(71) Applicant (for all designated States except US):</b> NEWCOM TECHNOLOGIES PTY. LTD. [AU/AU]; 25 Grenfell Street, Adelaide, S.A. 5000 (AU). <b>(72) Inventor; and</b> <b>(75) Inventor/Applicant (for US only):</b> BENSON, Keith [GB/AU]; Unit 9, 46A Robsart Street, Parkside, S.A. 5063 (AU). <b>(74) Agent:</b> COLLISON & CO.; 117 King William Street, Adelaide, S.A. 5000 (AU).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>
<b>(54) Title:</b> IMPROVEMENTS RELATING TO MOBILE PHONES  <div data-bbox="418 1157 1263 1717" data-label="Image">  </div> <b>(57) Abstract</b> <p>The invention is directed to a digital mobile phone (1) of a type using a subscriber identification module, the improvement being that there is an externally attached holder for at least two subscriber identification modules so that either can be readily selected by a switch (13) for use in the same phone. There are also described flexible circuits (6) that are used to connect the electrical contacts (7) used conventionally for reading a subscriber identification module by the phone (1) inside the phone that are able to slip through gaps that are naturally occurring between protective covers of the phone (1) because of necessary manufacturing tolerances so that the external subscriber identification modules can be connected without prejudicing manufacturers warranties on any phone.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic			SE	Sweden
CG	Congo	KR	Republic of Korea	SG	Singapore
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LR	Liberia	SZ	Swaziland
CS	Czechoslovakia	LT	Lithuania	TD	Chad
CZ	Czech Republic	LU	Luxembourg	TG	Togo
DE	Germany	LV	Latvia	TJ	Tajikistan
DK	Denmark	MC	Monaco	TT	Trinidad and Tobago
EE	Estonia	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	UG	Uganda
FI	Finland	ML	Mali	US	United States of America
FR	France	MN	Mongolia	UZ	Uzbekistan
GA	Gabon	MR	Mauritania	VN	Viet Nam

## IMPROVEMENTS RELATING TO MOBILE PHONES

This invention relates to digital mobile phones.

It is conventional in a digital mobile phone that there is a removable subscriber identification module in the form of a card which is fitted into an  
5 internal holder.

Such a module which shall hereinafter be referred to as a "subscriber identification module card" is a user replacement module for use by a commercial entity providing a network to ensure that the digital phone is connected to the commercial entities network.

10 It is possible for a user to have the subscriber identification module card of one commercial network provider as well as the subscriber identification module card of its competitor.

However, in phones currently available, the card is not readily accessible for removal and replacement with an alternate subscriber identification module  
15 card.

It can be achieved but, taking at least one instance, for instance, the currently available Nokia 2110 digital phone, to replace the subscriber identification module card of one network and replace it with another, the battery has to be removed, a first external cover has to be pulled out, and an interlocking  
20 bracket must be operated to release the locking position of a pivotal support which is pushed into the release position. It is then still a matter of manipulation to be able to remove the subscriber identification module card from the holder.

The actions required mean that the phone has to be turned off so that if one  
25 wants to change networks, one then has to go through the additional procedures of closing the phone down, and then starting the phone up again.

At the present time, digital networks are not co-extensive and further, the costs of accessing or using one network as compared to another vary considerably so that there is considerable advantage to an end user to be able to choose the network,

5 a) upon being within the range of a particular network or being in a position to better be able to receive a particular signal, and

b) alternatively that the price of a call from one network may be quite different to the price of another.

It is currently possible with the same phone to do this but with the effort  
1 0 involved in having to change over subscriber identification module cards, most people will either not consider doing so or will not be bothered in most cases.

The disadvantage of this is that one network provider which wishes to actively compete with other network providers, might then be at a considerable  
1 5 disadvantage because despite providing best prices, their network might not be quite as extensive and they therefore cannot persuade a phone user to use their network because the decision is made on the basis of both access and cost.

What I propose is a solution to this problem which will have particular value to a commercial network provider especially if they do not have such an  
2 0 extensive range and it will provide substantial advantages to users because it will enable them to make a better choice without as many of the current implicit difficulties.

According to one form of this invention there is provided a mobile of the type having a subscriber identification module wherein there are provided at least  
2 5 two subscriber identification modules and switch means accessible to the user and adapted for the user to select one or other of the modules.

In preference there is proposed that there is an external holder attachable to an existing mobile digital phone and adapted to take at least two subscriber identification module cards, switch means to provide access to any one of the

subscriber identification module cards held in the external holder and means connecting such connected external subscriber identification module card electrically to a subscriber identification module take-off adaptor adapted to be located within an existing internal subscriber identification module card holder  
5 of the digital mobile phone.

In a further form the invention can be said to reside in a digital mobile phone of a type having a user removable subscriber identification module card within an internal holder, characterised in that there is within the internal subscriber identification module card holder a take-off card having electrical contacts  
1 0 replicating any subscriber identification module card that would otherwise be therein, and connecting to electrical connections for electrical connection in the phone and having a wire take-off for each subscriber identification module connection, the wire take-off in each case extending to an outside of the body of the mobile phone to an external subscriber identification module card  
1 5 holder, the external subscriber identification module card holder being adapted to hold at least two subscriber identification module cards each having its electrical connections connected to the corresponding wire take-offs connected to the take-off card, and having a switch therewith adapted to change effective active connection from one of the subscriber identification  
2 0 module cards in the external card holder to a second of the subscriber identification module cards in the external card holder.

In another form of this invention this can be said to reside in for a digital mobile phone of a type having a user removable subscriber identification module card within an internal subscriber identification module card holder, a take off  
2 5 card having a wire take-off for each subscriber identification module connection within the holder the wire take-off adapted to extend through to an outside of the body of the mobile phone to an external subscriber identification module card holder attached to the phone casing, the external subscriber identification module card holder being adapted to hold at least two subscriber  
3 0 identification module cards with each having its electrical connections connected to the corresponding wire take offs connected to the wire take-off, and having a switch therewith to change effective active connection of the wire take offs from a first of any subscriber identification module cards in the external card holder to a second or other of any subscriber identification  
3 5 module cards in the external card holder.

One of the difficulties with such an arrangement, however, is the question of how one provides such electrical connections from the internal parts of the phone to an external subscriber identification module card holder.

5 I have carefully examined each of the mobile digital phones currently on the market and I have found that in each case, it is possible to provide a connection using very thin wires in some cases of less than 0.3 mm thickness by having the thin wires follow a path beneath the covers and around corners to the external subscriber identification module cardholder.

10 In preference the external subscriber identification module card holder will be adhered in an appropriate way to the body of an existing digital phone and the switch would in preference be a mechanical switch.

Further, in preference, within the external card holder, there can be additionally provided electronically accessible memory and programmed software in the memory to provide additional functions as far as the digital  
15 mobile phone is concerned.

For instance, it is proposed in preference that such logic would examine through its connections with the digital phone, the best accessible network connection to be used, and also the best from a point of view of cost.

20 In such a case, there can be the additional feature of an electronics switch operated by the logic so that the user of the phone no longer has to make a decision as to which network to choose but this will be made on the basis of either cost or best signal as the case might be which can be previously selected for the logic to choose.

25 Further, there can in fact be additional memory to have additional recording of audio signals and any number of additional features can then be incorporated within or connected to the external module to be joined with the functions of the digital phone.

Further in preference there is provided that the wire take-offs are together an integrated flexible circuit board where there is a substrate, a laid conducting

track for each circuit on the substrate and an overlay coating.

In preference the substrate is comprised of polyester plastics material.

In preference the conducting tracks are copper with gold contact surfaces.

5 What now will be seen to be the case in preference is that there is a digital mobile phone of a type using a subscriber identification module, the improvement being that there is an externally attached holder for at least two subscriber identification modules so that either can be readily selected by a switch for use in the same phone.

10 Further in preference there are flexible circuits that can be used to connect electrical contacts used conventionally for reading a subscriber identification module by the phone inside the phone that are able to slip through gaps that are naturally occurring between protective covers of the phone because of necessary manufacturing tolerances so that the external subscriber identification modules can be connected without prejudicing manufacturers  
15 warranties on any phone.

For a better understanding of this invention it will now be described by reference to preferred embodiments which will be described with the assistance of drawings wherein:

20 Figure 1 is a perspective view of a digital phone according to a first embodiment where the illustration shows a phone with battery and SIM card holder removed and showing a conducting track shaped to follow a path to a switch at the top of the phone,

Figure 2 Is a perspective view of the top of the phone as shown in Figure 1,

25 Figure 3 is a further perspective view as shown in Figures 1 and 2 from a top of the phone, however, with the switch changed in position from a first position to a second position, and with a battery in position,

6

Figure 4 is the same phone as in Figures 1, 2 and 3 and illustrates a further view of this according to the first embodiment,

Figure 5 is a view of a second phone according to a second embodiment where the illustration shows a perspective view with a Subscriber Identification Module (SIM card) cover in an open position and battery removed, and a track from a take off card replacing a Subscriber Identification Module,

Figure 6 is a view of the same phone from the same position as shown in Figure 5 except a wire take off is shown in full with the shape of the phone in dotted outline,

Figure 7 is a view of the same phone as in Figures 5 and 6 with however a SIM card holder in an opened position about to take a take off card replacing a SIM card preparatory to locating the wire take off in the path to an external switch attached to the phone,

Figure 8 is a perspective view of a phone according to a third embodiment where in this case, the battery is removed to assist in seeing the features, and a switch is attached to the back of the phone connecting to the Subscriber Identification Module in this case,

Figure 9 is a cross sectional view according to a fourth embodiment the internal parts of the phone being shown schematically as simply cross hatched where of course there are functional electronic components within the phone which are of not direct relevance to the invention, the illustration showing the path of a flexible track in this case,

Figure 10 is a cross sectional view similar to Figure 9 of a further phone wherein this case the battery is also shown connected but wherein the internal details of the battery are shown simply as cross hatched for sake of simplicity,

Figure 11 is a cross sectional view in schematic form of the embodiment generally shown in Figure 8,



Figure 12 is a perspective view of a further embodiment where the switch in this case is shown being connected to a flip lid on a phone and the track in this case is connecting through a flexible connection,

Figure 13 is a further view of the same phone as in Figure 12,

5 Figure 14 is a plan view of a flexible track according to a typical layout,

Figure 15 is a perspective view of the arrangement as shown in Figure 14 of the track,

Figure 16 is a cross sectional view along the lines of 16,

10 Figure 17 is an exploded view of the components of switch means connecting to a flexible wire take off track,

Figure 18 is a cross sectional view of the assembled switch means as shown in Figure 17 in the exploded view,

Figure 19 is an opposite cross sectional view of the same switch as shown in Figure 18, and

15 Figure 20 is an end elevation of the switch as shown in Figures 18 and 19 and in the exploded view in 17.

20 Now referring in detail to the drawings, and in particular to Figures 1, 2, 3 and 4, the phone in this case 1 is a typical of a currently manufactured digital phone having control buttons on its front at 2, microphone at 3, sound output at 4 and a visual display at 5.

At the back of this phone, there are provided means to hold a Subscriber Identification Module which uniquely identifies a subscriber to a provider of a digital communications service.

In this case, with battery removed as particularly shown in Figure 1, a flexible track 6 is formed initially in a planar shape and is assembled so as to have a polyester substrate, a track deposited into an etched channel within the polyester substrate to provide for conduction along the track, and a coating  
5 over this again of a polyester plastics material.

This is chosen so that the material itself will firstly be sufficiently flexible to be able to be subsequently shaped so as to follow very closely a somewhat tortuous path that will be necessary to convey electrical wire connections from a take off card 7 the connections of which then pass appropriately around  
1 0 corners such as at 8, 9, 10 and 11, firstly so that they can be firmly held in position by adhering to the surface of the material over which they pass and then secondly so that they are sufficiently thin so as not to interfere with interconnecting components that will otherwise have to be relocated in position.

1 5 The track also diverts from one linear direction through a diagonal orientation to another lineal direction at 12.

Finally the track connects into switch 13.

The switch 13 includes means to hold two Subscriber Identification Modules. By reason of a change in position of the switch 13 from in this case (1) to (2)  
2 0 the effective active electrical connections connected by reason of the take off card 7 will therefore be effectively changed. It will now be seen that by the attachment to the phone 1 of such an electrically conducting track this allows for the user to choose at least one of either of two Subscriber Identification Modules by the simplest of actions. Such an action will not of itself necessarily  
2 5 also require the phone to be switched off and the user can therefore quickly check whether there is service to be provided by one or other of the providers for which the SIM cards are in place.

Further, by reason that the electrical track is of a total thickness of approximately six thousandths of an inch, ( this may be within the range of four  
3 0 thousands of an inch to eight thousandths of an inch,) this will not of itself in any cases so far established interfere with any of mechanically interlocking

parts that will subsequently have to be reconnected such as a cover plate or a battery connection in an existing mobile phone.

I will now refer to a remainder of telephones and to examples of shapes of track which will be effective, but in general, it will now be seen that it appears  
5 that any commercially available digital phone using a Subscriber Identification Module can be appropriately modified to have this additional advantageous feature.

For instance, let us look at the embodiment illustrated in Figures 5, 6 and 7. In this case the phone 14 is of a type which has a separate compartment for the  
10 SIM card which can only be opened subsequent to a battery being removed.

Accordingly, the compartment shown at 15 is accessible by opening a sliding cover 16 which in Figure 5 for instance and in Figure 7 is shown in the open position.

A Subscriber Identification Module is intended to be held in a holder at 17  
15 which of itself is pivotally supported at 18.

As shown then, according to this embodiment, a take off card at 18 is inserted in the SIM holder 17 and such then that the electrical contacts at typically 19 will engage against the appropriate electrical connectors of the phone at 20.

The thin track, again of a thickness of approximately six thousandths of an  
20 inch, and comprised of two layers of polyester plastics material, is carefully shaped to then be positioned on the back of the holder 17 and then tracked out from the compartment across an edge at 21 to a switch at 22.

Again in this case then there is able to be connected the SIM card take off electrical connections to separate and therefore easily accessible switch  
25 means at 22.

The track in this case is also adhered to an external surface of a body of the phone to keep this in a protected position.

10

Now referring to the drawing at Figure 8, this is a third embodiment and is the illustration of a most recent model of digital phone with in this case a battery being removed but as can be seen, there is an electrical take off card at 23 which is held in position by a slideable catch at 24 and in this case then  
5 electrical connections are run through a pathway as shown at 24 which then track around outer surfaces of the body until they meet the switch at 25 which has a visual window at 26 to indicate which one of two SIM cards has been chosen. There is an end switch member at 27 by which switching is achieved.

In this case also, the track 24 is adhered to the surface of the phone and by  
10 reason of its thinness and its material structure such that its substrate and cover is of polyester plastic materials, it is able to follow closely corners of the track with very small radius without fracture. The track is adhered to the surface of the phone casing to assist in long term stability and mechanical support. In this case, there is also provided an over cover protective coating  
15 also adhered across the track and to the casing at both sides of the track.

Figure 9 shows somewhat schematically the way in which the electrical track is located to extend between take off card at 28 and switch at 29.

The card 28 is held so that its conducting face will electrically connect with connectors such as 30 and then the track of the conducting layers will then  
20 follow as shown at 31 for instance until it reaches the switch means 29 where the track itself is folded into a circuitous shape so that respective Subscriber Identification Modules shown at 32 in the one case and 33 in the other will in each case have their oppositely directed electronic parts accessible for electrical connection to the track.

25 This is shown in a further instance in Figure 10 where the track 34 passes from a take off at 35 to switch means at 36 with two Subscriber Identification Modules at 37 and 38 being adapted to be in electrical contact with their effective active connections.

30 A further example of this is in Figure 11 where again track 39 is shown to very closely follow an external shape of the phone body at 40 noting that the general cross hatching is schematic only. In this case again, battery at 41

1 1

then can be shown to leave quite clear at 42 any contact or need to squeeze the track 39.

5 The track in this case again is of six thousandth of an inch total thickness and the tolerance or clearance between the respective mating members such as the battery. The housing will allow for an even larger thickness there between before there is interference with any effective action of the battery being relocated or being placed in position.

There is a switch, in this case again at 43 with the Subscriber Identification Modules at 44 and 45. There is a, take off at 46.

1 0 Referring now to Figures 12 and 13, the difference here is that this is an embodiment applying to a so called "flip phone".

In this case, there is a cover shown at 47 which can be opened to reveal a keypad and also to provide a microphone position.

1 5 In this case however, a switch means at 48 can be located on the outer surface of the cover 47 and a flexible track at 49 can be allowed to stay clear of being adhered throughout to the cover 47 This allows for a hinging flexible action of the flexible track with a larger radius so that the track which is only six thousandth of an inch thickness can more readily allow for repeated hinging, without undo metal fatigue of the track materials.

2 0 Not shown is a connection of the track to an appropriate internal Subscriber Identification Module provided by the manufacturer.

2 5 Figure 12 illustrates the fact that in this case, the Subscriber Identification Module is of a larger size such as the size of traditional credit card shown at 50 but here again it works in the same way as those applications previously described.

We now refer to Figures 14 and 15. These Figures show specifically a typical track comprised of the dual laminate of polyester plastics materials and the

inlaid copper track.

There are at a take off location at 51 electrical contact points shown typically at 52 and 53 which are in turn, coated with an appropriate long lasting material such as gold or iridium and these are left open for electrical contact purposes.

- 5 At the switch, contact with respective Subscriber Identification Modules is achieved by folding over the track and accordingly the track itself has two sets of electrical contactors shown at 54 in the one case and 55 in the other. There are breaks in the circuit shown at 56 so that an electrical contactor can variously connect connections say to the take off connectors at 58 in the one  
10 case or the connectors at 59 for connection to the contactors at 58 in the other.

The way this works is shown more generally at Figure 17.

- Accordingly, referring to Figure 17, a track at 60 is folded over generally into an "S" shape so that upper most there are switch connectors at 61, 62 and 63, and such that two Subscriber Identification Modules at 64 and 65 will each fit  
15 in a slot shown at 66 so that both an upper and lower face of the two SIM cards will therefore present their electrically open contact surfaces.

- An electrical contact plate at 67 is held under the pressure of a foam pad 68 within switch operative plate 69 and such that respective electrical connections will bridge either between the contacts of 61 and 62 in the one  
20 case or 62 and 63 in the other and thereby bring into active connection the module either 64 in the one case or 65 in the other.

- There is a housing at 71 and a cover at 72 to hold all of these pieces together. When assembled, the switch has a cross sectional view as shown in Figures 18 and 19 from where it will be seen that the track 60 will be caused to bend  
25 tightly back on itself at 73 providing an uppermost surface by which the electrical connections at 67 can then effectively contact and bridge across the appropriate contact surfaces.

This then illustrates how the invention can be put into practice in various modes.

13

From the description, it will be seen that there can be provided in a very effective way to substantially all of the mobile digital phones that are known to exist means to significantly improve these for access by the user in respect of providing alternate providers at the whim of the user. Such a modification can  
5 be economically prepared and provided, and can be installed very simply by appropriate people. It will not provide any interference to conventional enjoyment or the size or location of any digital mobile phone currently available.

With conventionally engineered plastic covers there has been found to be  
10 ample gaps of sufficient size to slip electrical track there through and this enables connections to be made which do not rely in the slightest on any manufacturers approval because the inner electrical components are not prejudiced and warranties will therefor not be affected.

At the same time this gives significant advantage to a consumer who can then  
15 simply and cheaply expand functions of a phone both by reason of easy alternative SIM card access and other logic connections.

## CLAIMS



1. A digital mobile phone of a type having a subscriber identification module wherein there are provided at least two subscriber identification modules and switch means accessible to the user and adapted for the user to select one or other of the modules.  
5
2. An external holder attachable to an existing mobile digital phone and adapted to take at least two subscriber identification module cards, switch means to provide access to any one of the subscriber identification module cards held in the external holder and means connecting such connected  
10 external subscriber identification module card electrically to a subscriber identification module take-off adaptor located within the existing internal subscriber identification module card holder of the digital mobile phone.
3. A digital mobile phone of a type having a user removable subscriber identification module card within an internal holder characterised in that there  
15 is within the internal subscriber identification module card holder a take off card replacing any subscriber identification module therein and connecting to electrical connections for electrical connection of the subscriber identification module card to the phone and having a wire take-off for each subscriber identification module connection the wire take-off extending through to  
20 outside of the body of the mobile phone to an external subscriber identification module card holder, the external subscriber identification module card holder being adapted to hold at least two subscriber identification module cards with each having its electrical connections connected to the corresponding wire take offs connected to the wire take-off, and having a switch therewith to  
25 change effective active connection of the wire take offs from a first of any subscriber identification module cards in the external card holder to a second or other of any subscriber identification module cards in the external card holder.
4. For a digital mobile phone of a type having a user removable subscriber identification module card within an internal subscriber identification module  
30 card holder, a take off card having a wire take-off for each subscriber identification module connection within the holder the wire take-off adapted to extend through to an outside of the body of the mobile phone to an external





- subscriber identification module card holder attached to the phone casing, the external subscriber identification module card holder being adapted to hold at least two subscriber identification module cards with each having its electrical connections connected to the corresponding wire take offs connected to the wire take-off, and having a switch therewith to change effective active connection of the wire take offs from a first of any subscriber identification module cards in the external card holder to a second or other of any subscriber identification module cards in the external card holder.
- 5
- 10 5. A digital mobile phone of a type having a user removable subscriber identification module card within an internal holder, characterised in that there is within the internal subscriber identification module card holder a take-off card having electrical contacts replicating any subscriber identification module card that would otherwise be therein, and connecting to electrical connections for electrical connection in the phone and having a wire take-off for each
- 15 subscriber identification module connection, the wire take-off in each case extending to an outside of the body of the mobile phone to an external subscriber identification module card holder, the external subscriber identification module card holder being adapted to hold at least two subscriber identification module cards each having its electrical connections connected
- 20 to the corresponding wire take-offs connected to the take-off card, and having a switch therewith adapted to change effective active connection from one of the subscriber identification module cards in the external card holder to a second of the subscriber identification module cards in the external card holder.
- 25 6. Any one of the preceding claims 2 through 5 further characterised in that the wire take offs are together an integrated flexible circuit board where there is a substrate, a laid conducting track for each circuit on the substrate and an overlay coating.
- 30 7. Any one of the preceding claims 2 through 6 further characterised in that the wire take offs are together an integrated flexible circuit board where there is a substrate comprised of polyester plastics material, a laid conducting track for each circuit on the substrate and an overlay coating of polyester plastics material.
8. A digital phone substantially as described in the specification with



reference to and as illustrated by any one of the Figures of the accompanying drawings.


9. A take off card having a wire take-off for each subscriber identification module connection within the holder the wire take-off adapted to extend  
5 through to an outside of the body of the mobile phone to an external subscriber identification module card holder attached to a casing of the phone being substantially as described in the specification with reference to and as illustrated by Figures of the accompanying drawings.

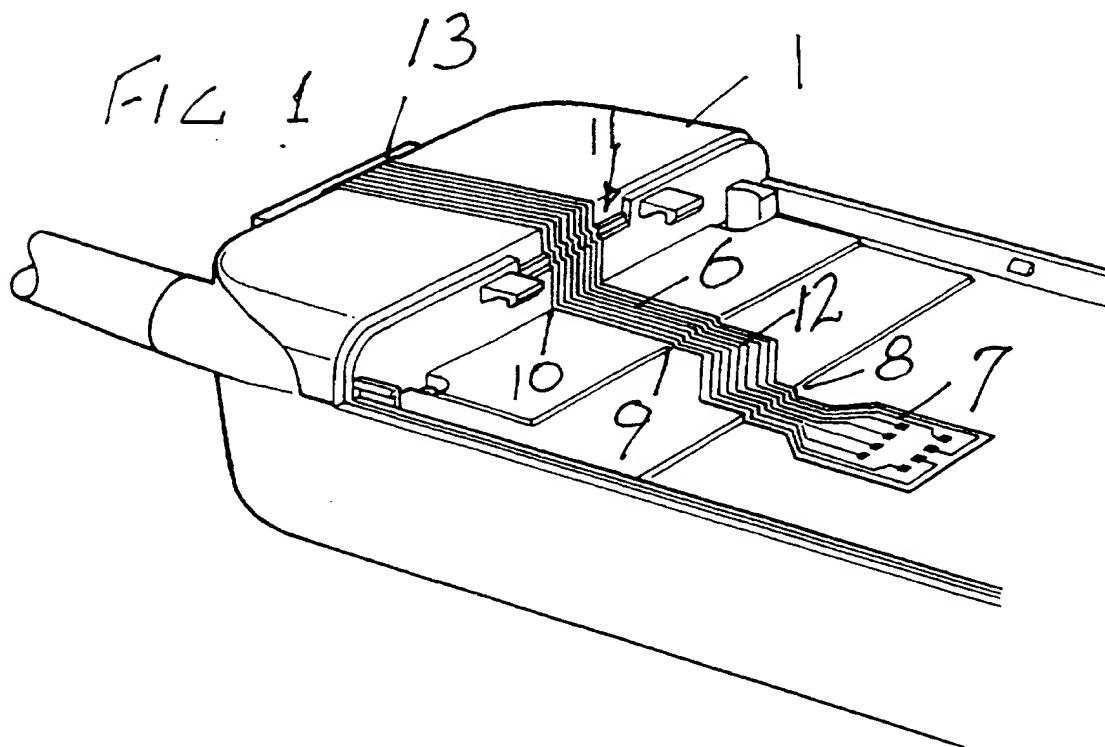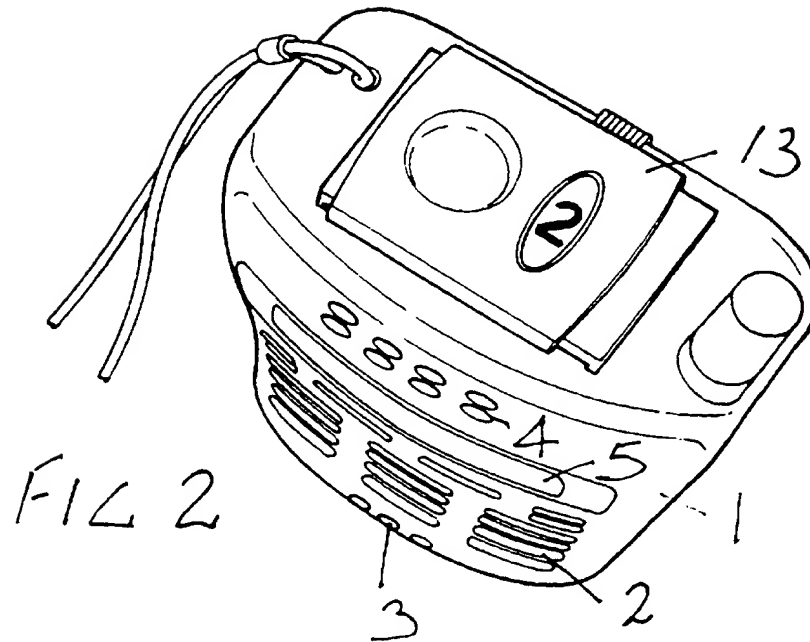

2/12

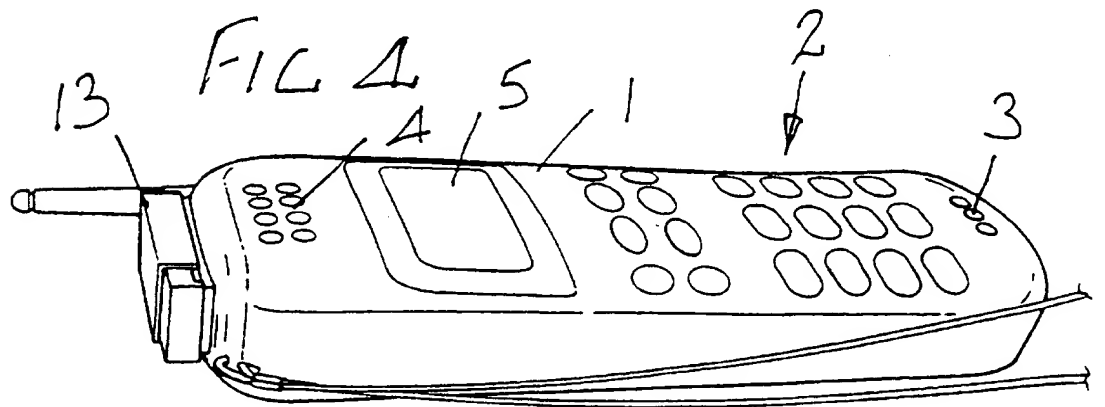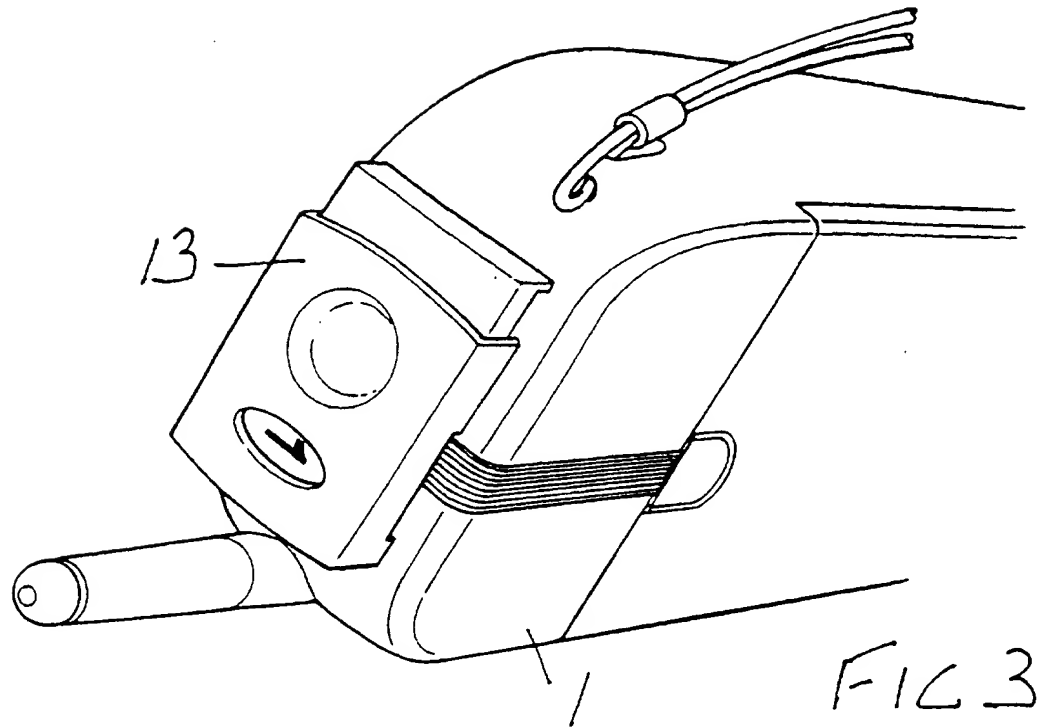

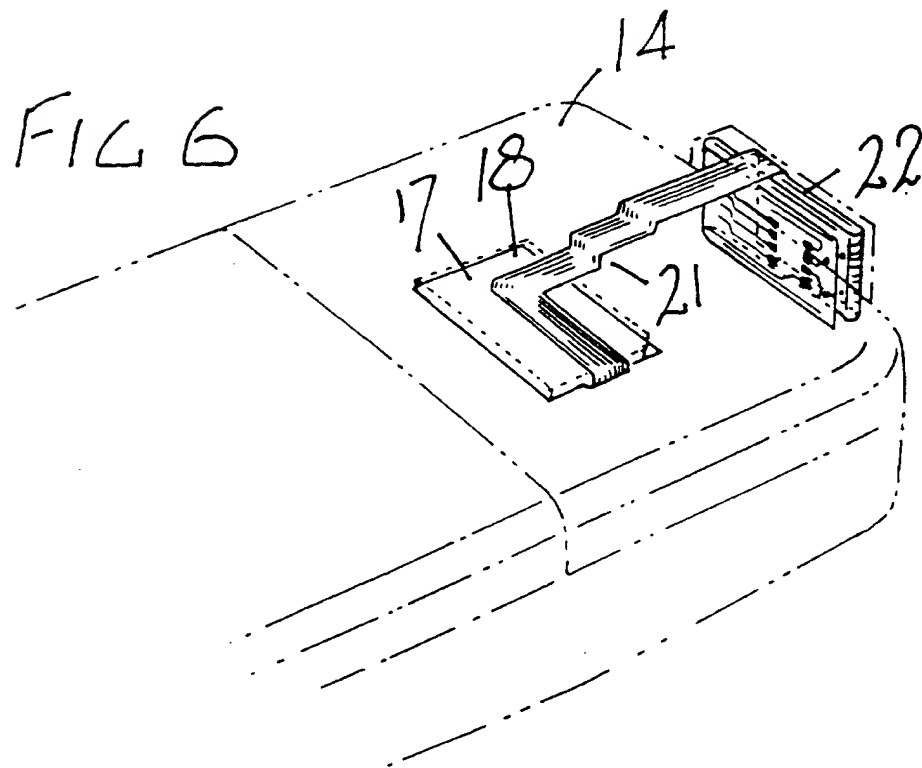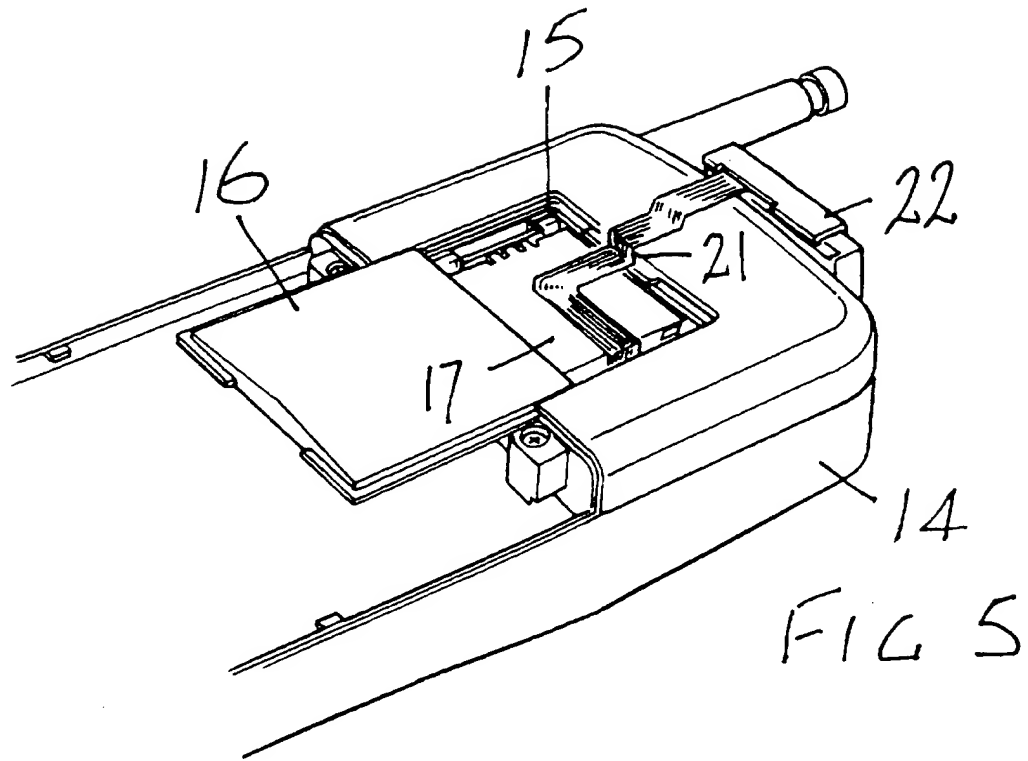

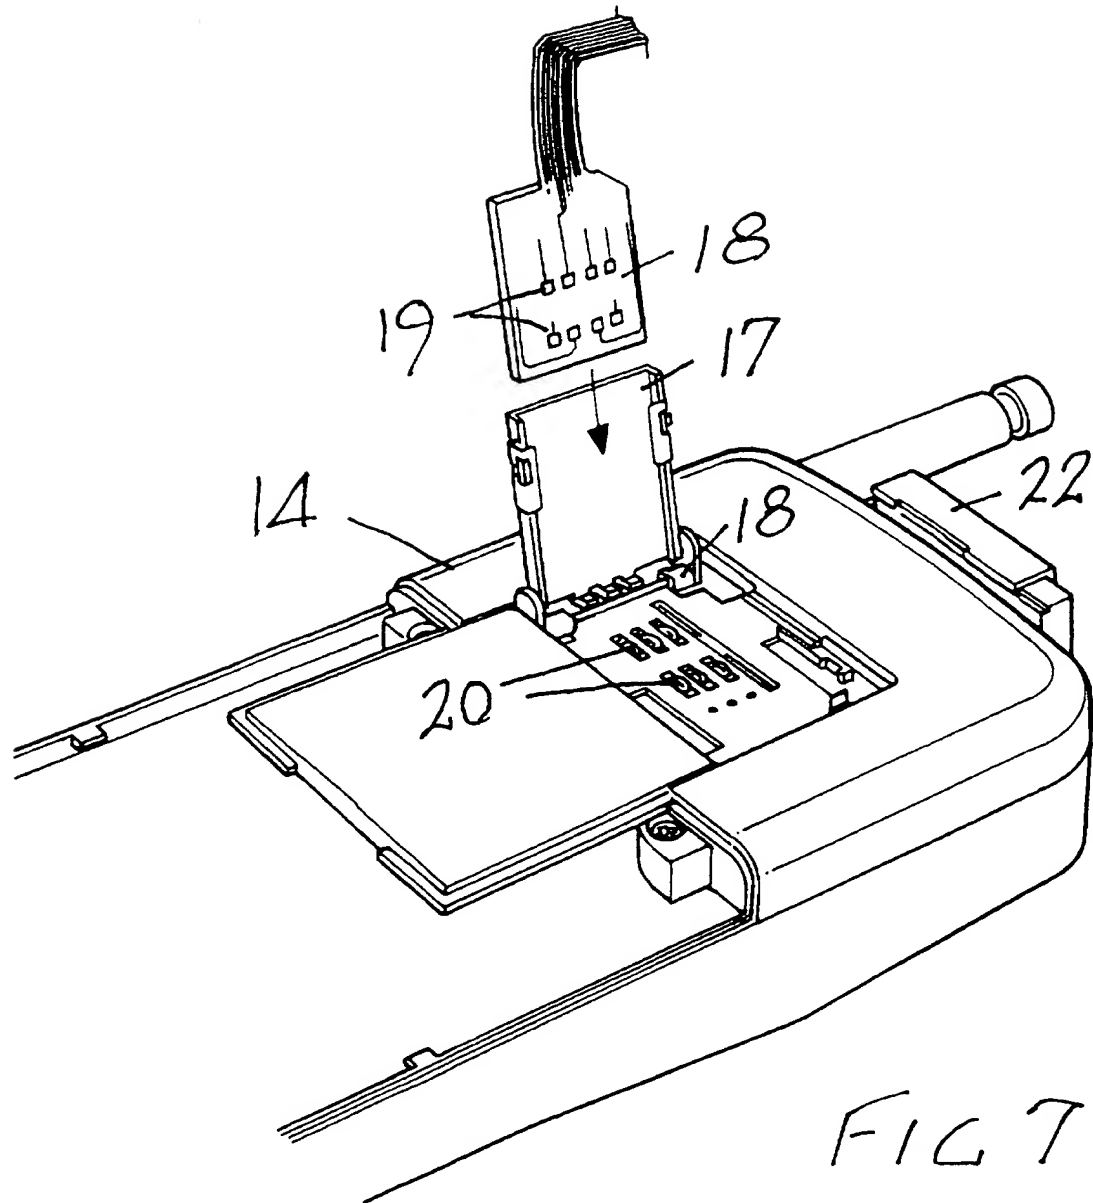

5/12


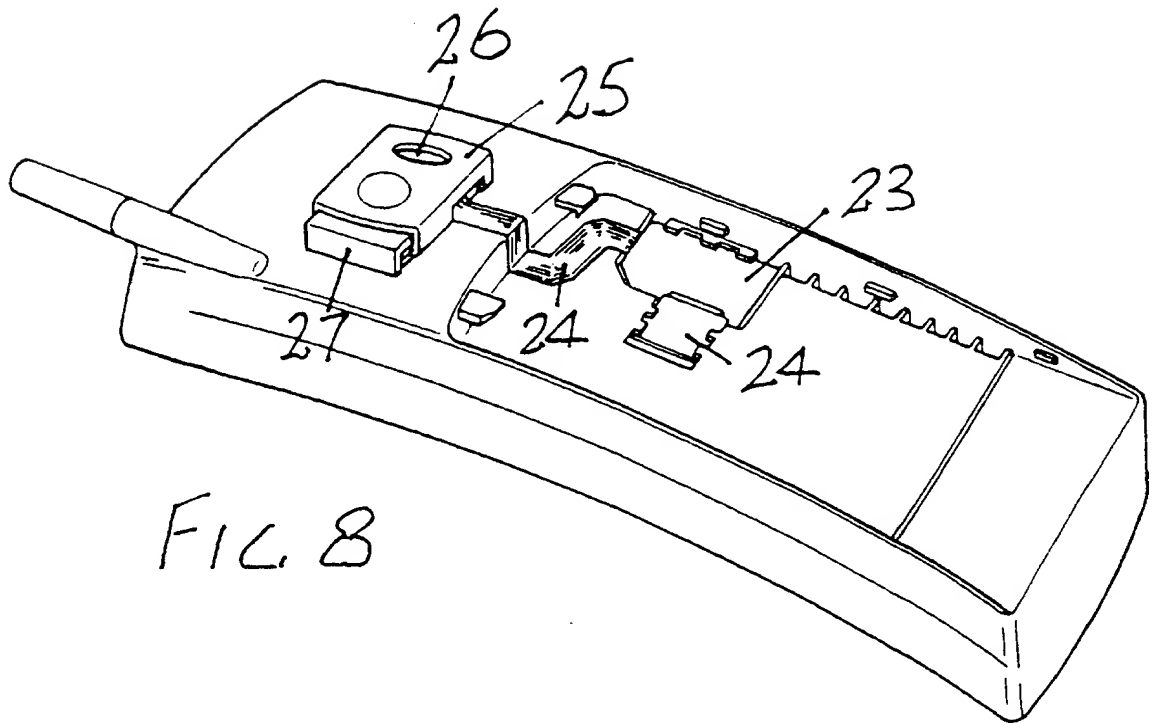



FIG. 8


6/12



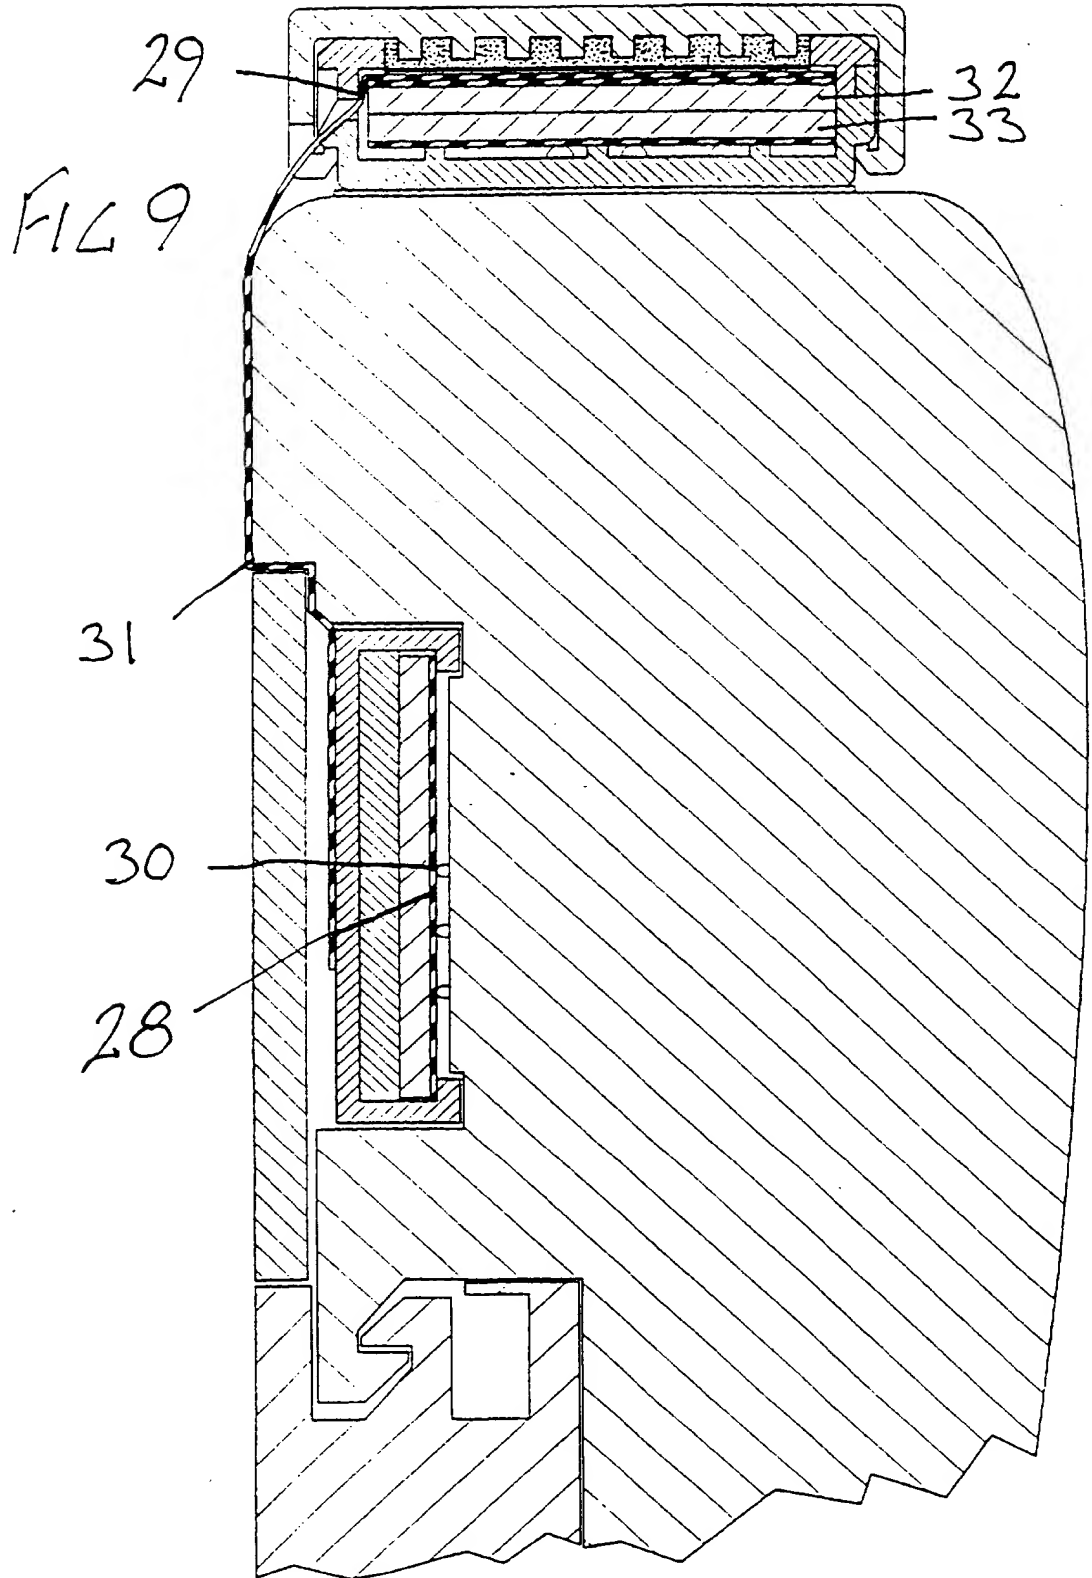


7/12

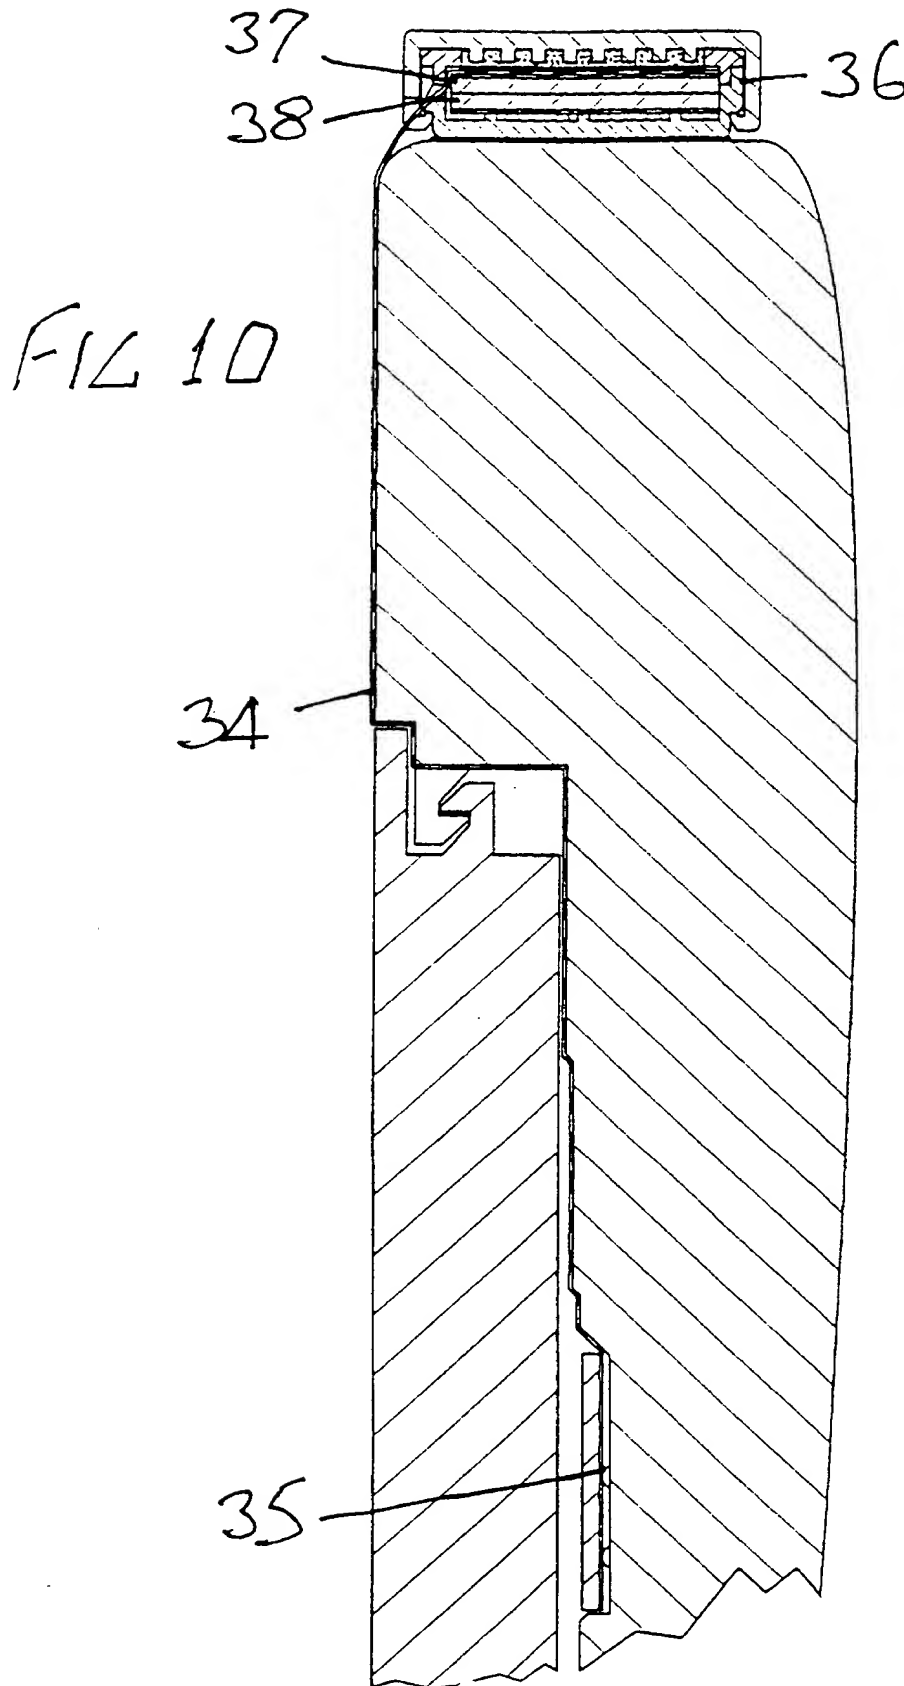

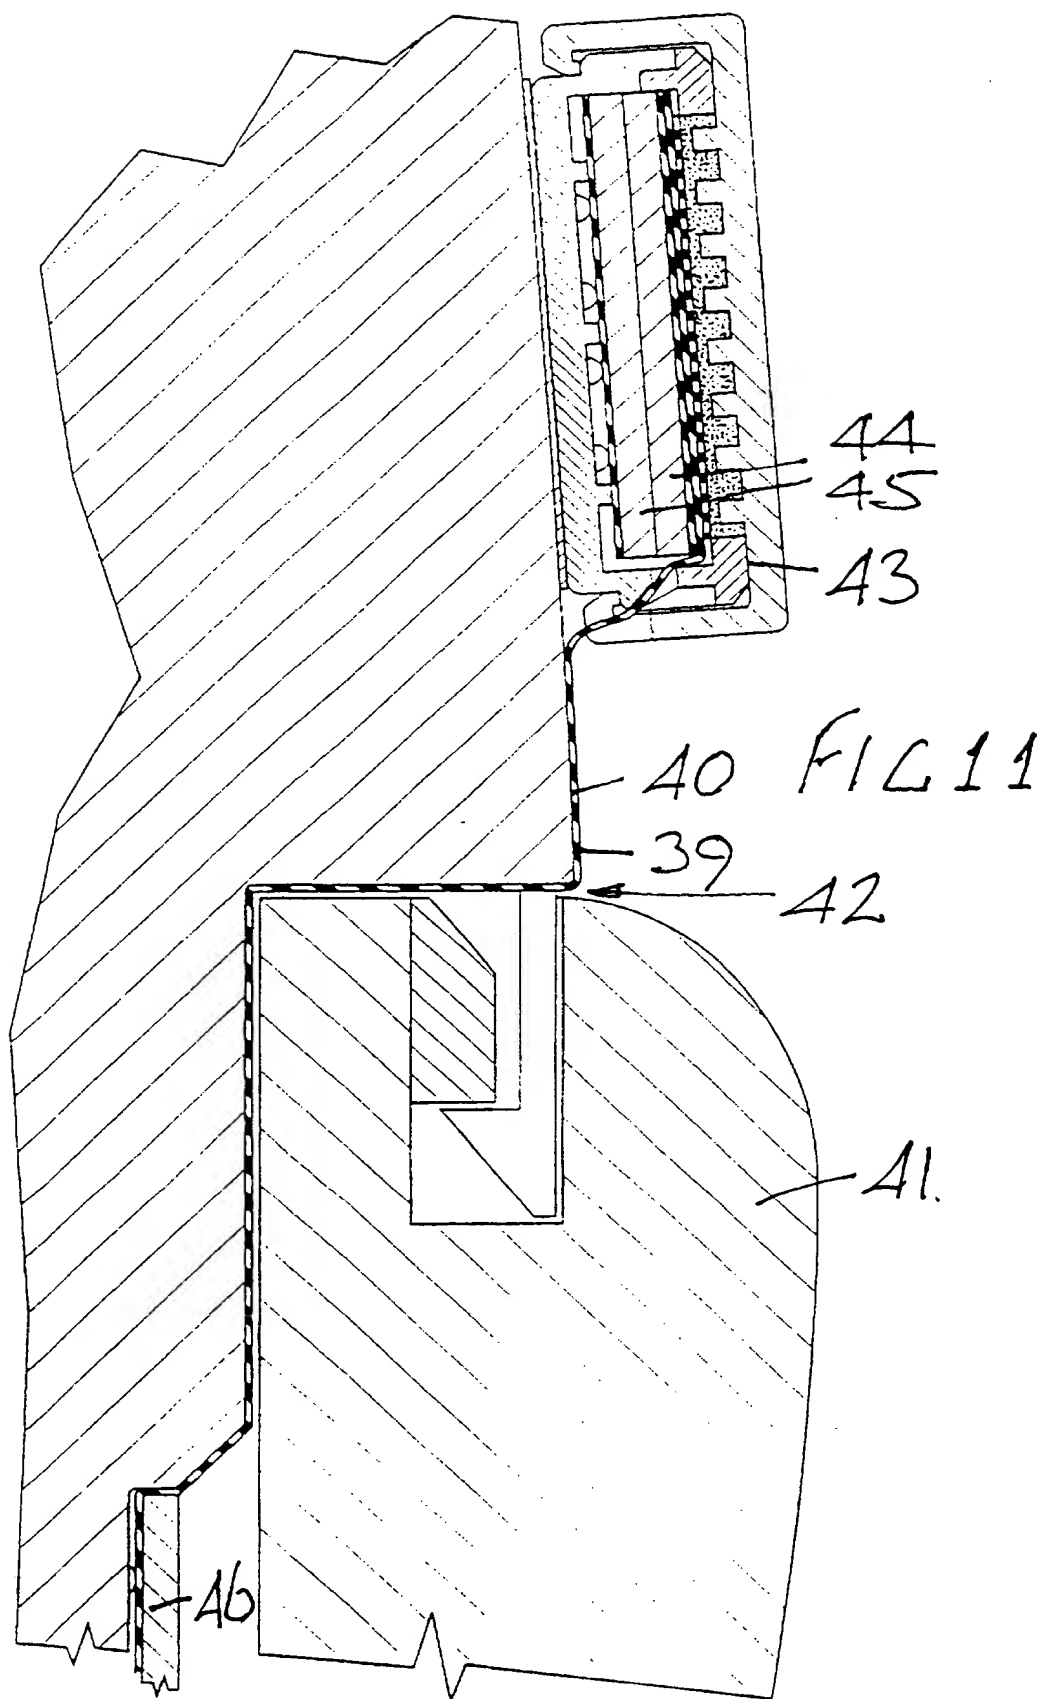

9/12

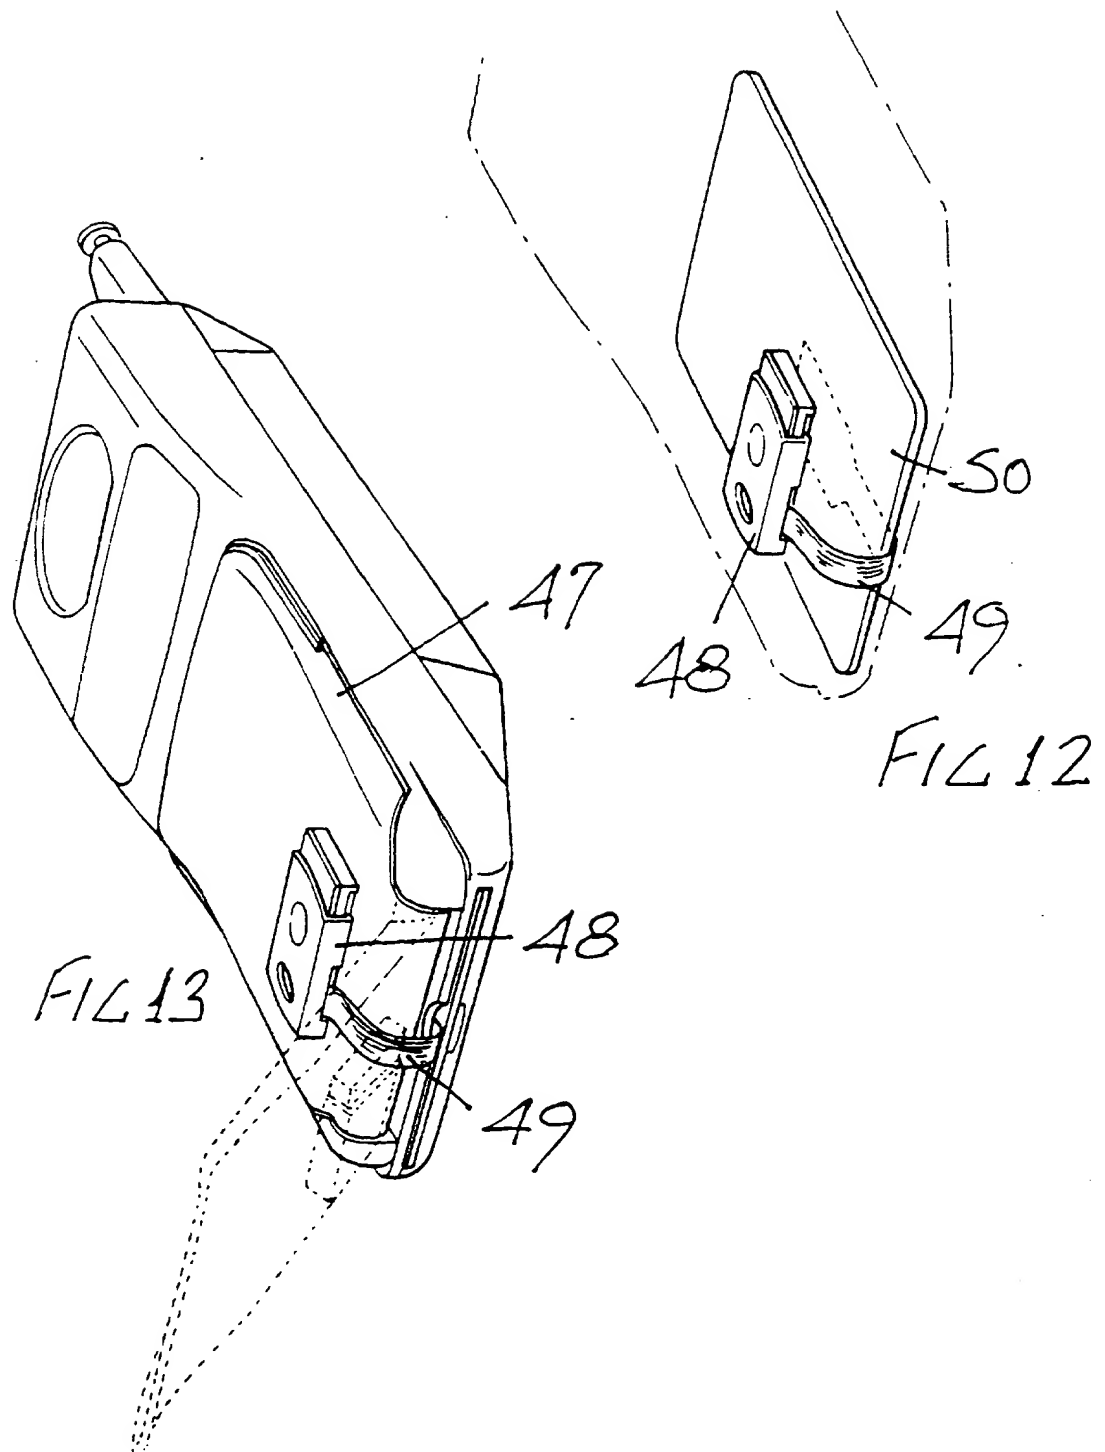

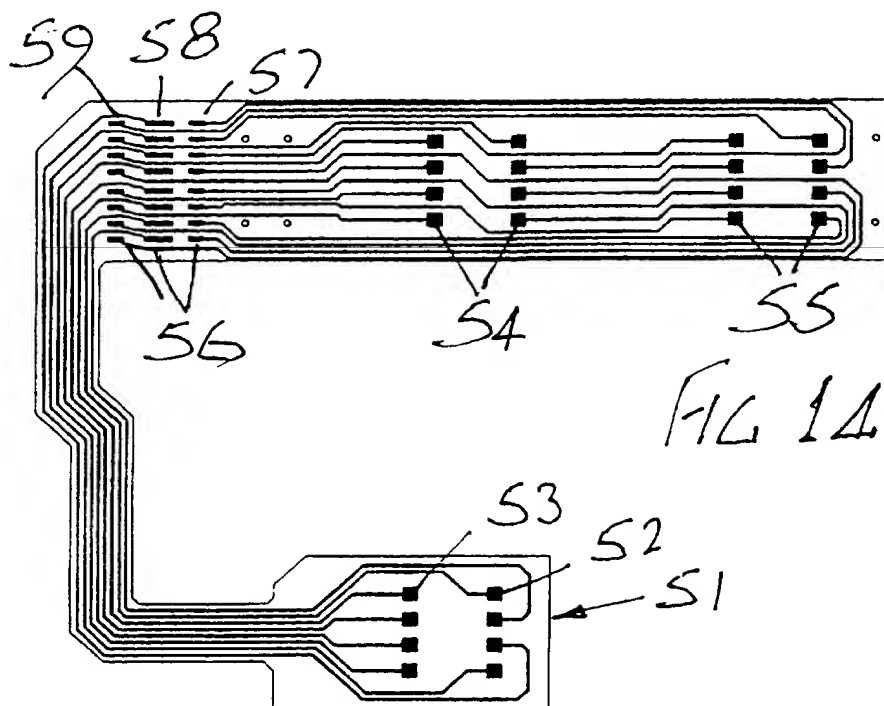


FIG 14

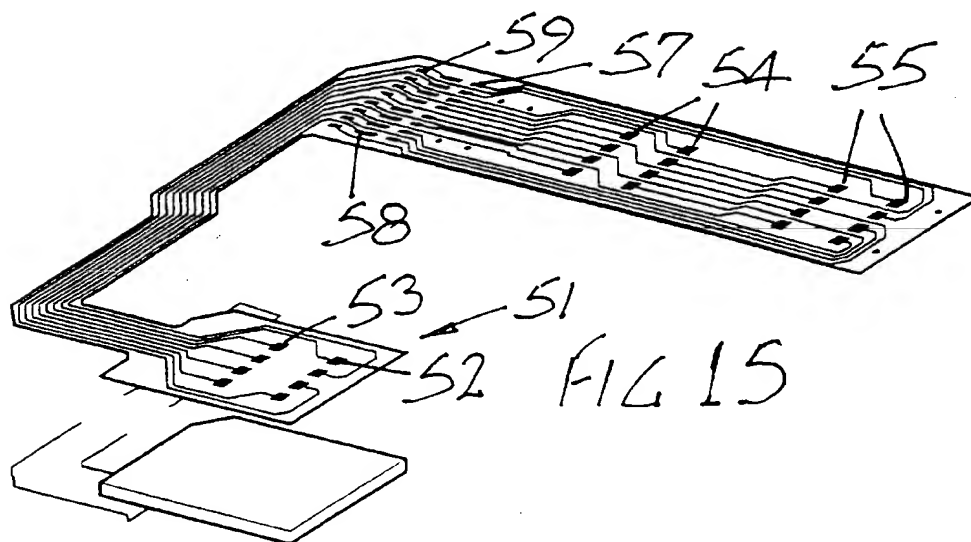


FIG 15





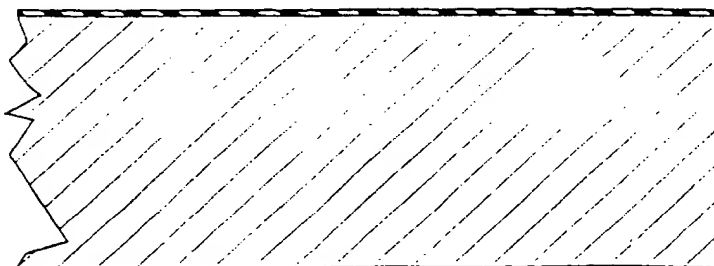


FIG 16

11/12

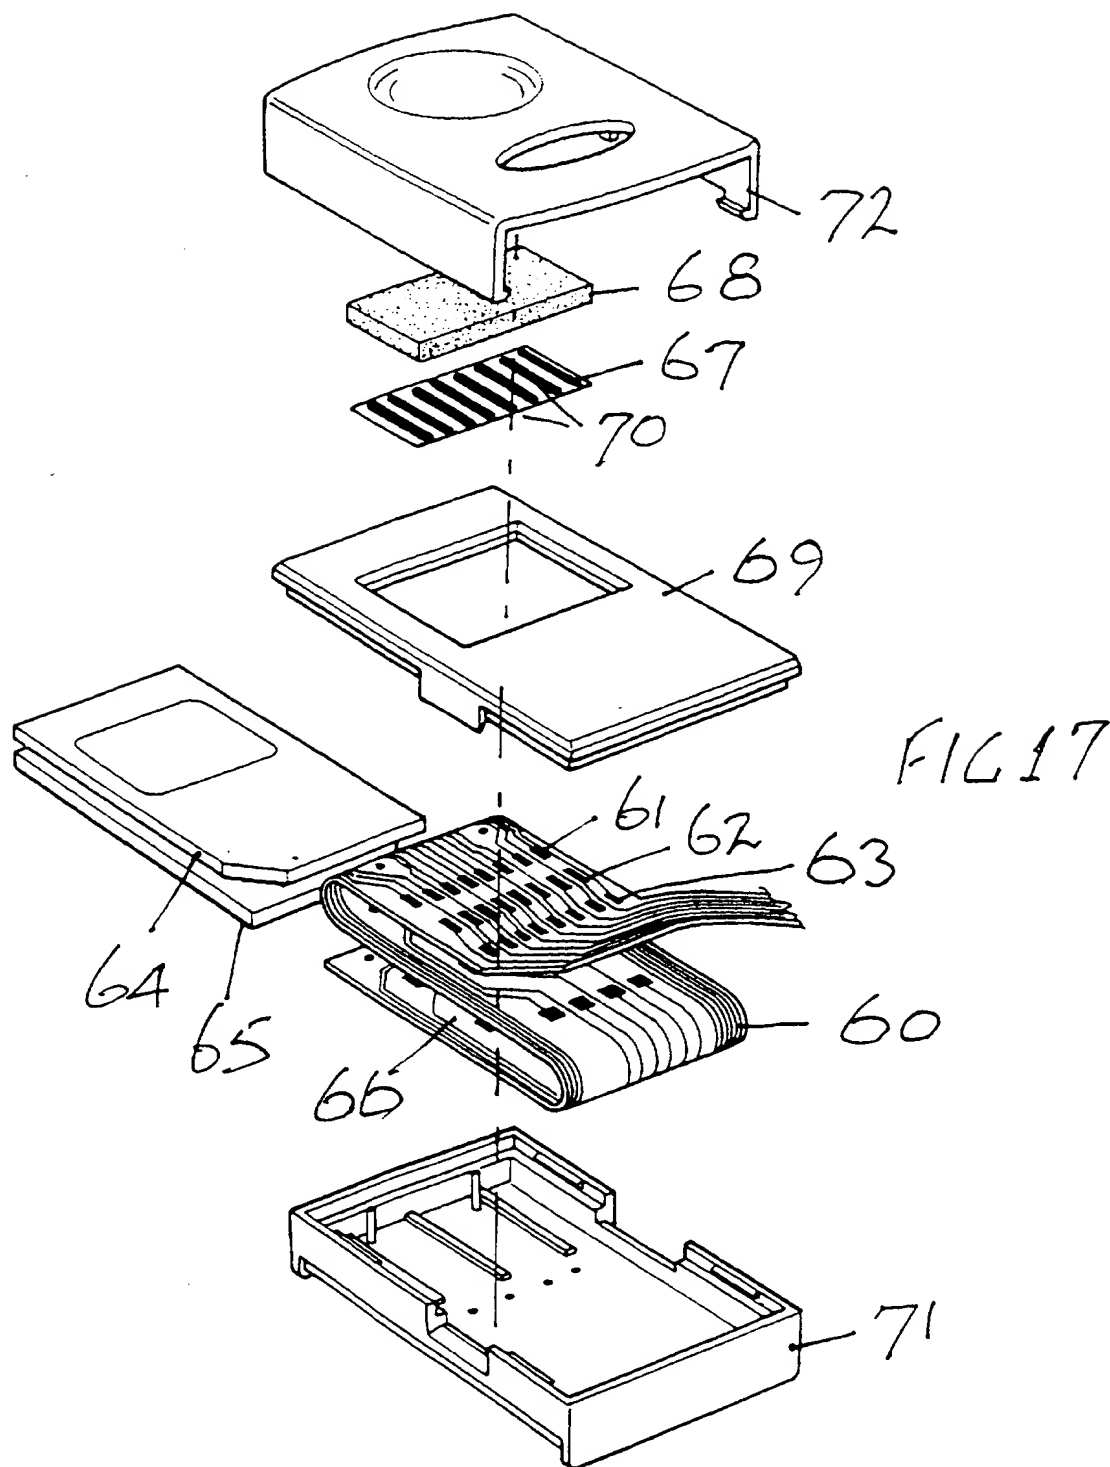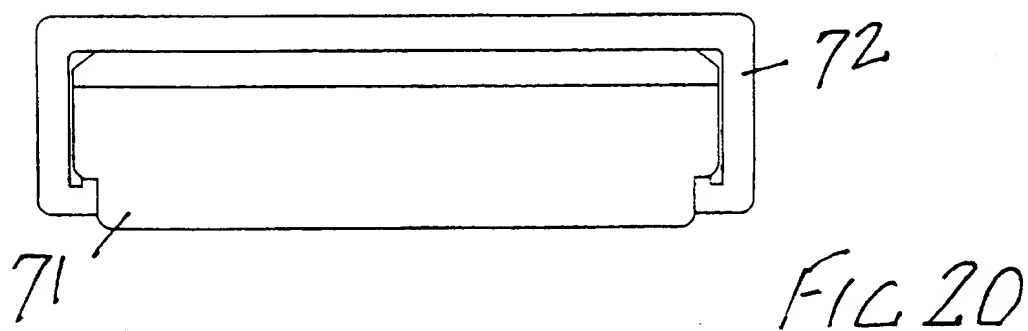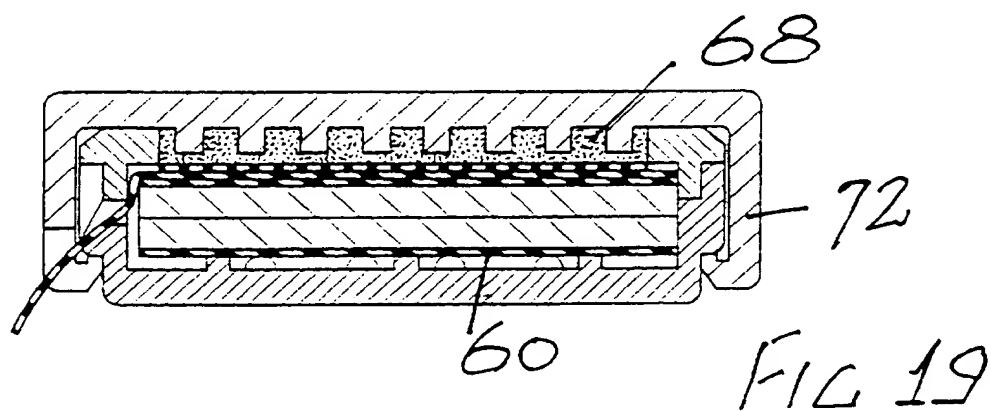

12/12

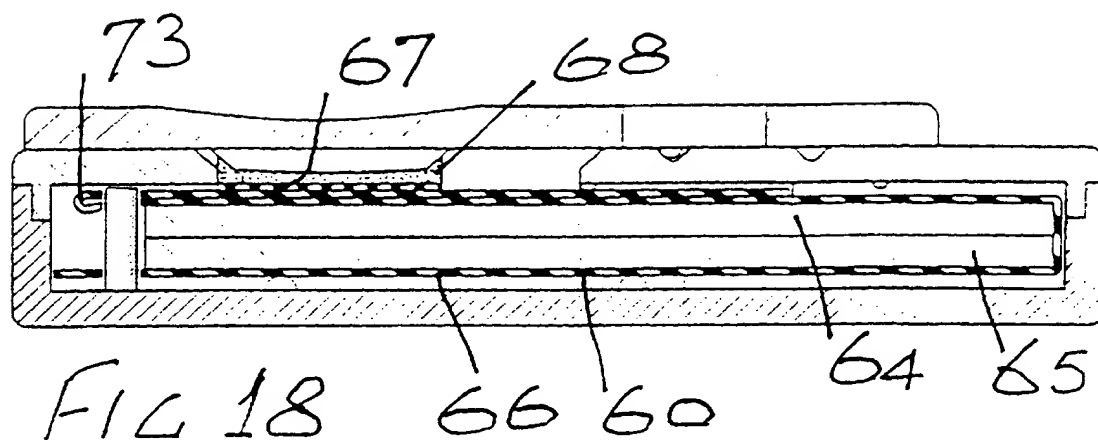

# INTERNATIONAL SEARCH REPORT

International Application No.  
PCT/AU 96/00802

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>																						
Int Cl <sup>6</sup> : H04B 7/26, H04M 15/00, H04Q 7/20 7/32 7/38																						
According to International Patent Classification (IPC) or to both national classification and IPC																						
<b>B. FIELDS SEARCHED</b>																						
Minimum documentation searched (classification system followed by classification symbols) IPC H04B 7/26, H04M 15/00, H04Q 7/04 7/20 7/32 7/38																						
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched AU : IPC as above																						
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) DERWENT : SIM and SWITCH: JAPIO : SIM and SWITCH:																						
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>																						
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No. ....																				
Y	WO 95/12293 A (ALCATEL N.V.) 04 May 1995 whole document	1-9																				
Y	EP 0556970 A (NOKIA MOBILE PHONES LTD.) 25 August 1993 whole document	1-9																				
A	WO 95/32590 A (TELECOM FINLAND OY) 30 November 1995 whole document	1-9																				
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex																						
<p>* Special categories of cited documents:</p> <table border="0"> <tr> <td>"A"</td> <td>document defining the general state of the art which is not considered to be of particular relevance</td> <td>"T"</td> <td>later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>"E"</td> <td>earlier document but published on or after the international filing date</td> <td>"X"</td> <td>document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>"L"</td> <td>document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>"Y"</td> <td>document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>"O"</td> <td>document referring to an oral disclosure, use, exhibition or other means</td> <td>"&amp;"</td> <td>document member of the same patent family</td> </tr> <tr> <td>"P"</td> <td>document published prior to the international filing date but later than the priority date claimed</td> <td></td> <td></td> </tr> </table>			"A"	document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	"E"	earlier document but published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	"O"	document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family	"P"	document published prior to the international filing date but later than the priority date claimed		
"A"	document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention																			
"E"	earlier document but published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone																			
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art																			
"O"	document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family																			
"P"	document published prior to the international filing date but later than the priority date claimed																					
Date of the actual completion of the international search 18 February 1997		Date of mailing of the international search report 27 FEB 1997																				
Name and mailing address of the ISA/AU AUSTRALIAN INDUSTRIAL PROPERTY ORGANISATION PO BOX 200 WODEN ACT 2606 AUSTRALIA Facsimile No.: (06) 285 3929		Authorized officer  R.W.J. FINZI Telephone No.: (06) 283 2213																				

# INTERNATIONAL SEARCH REPORT

International Application No.

PCT/AU 96/00802

C (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0616458 A (NEC CORPORATION) 21 September 1994 whole document	1-9
A	EP 0586081 A (NOKIA MOBILE PHONES TD) 09 March 1994 whole document	1-9
A	WO 94/08433 A (AB NORDICTEL) 14 April 1994 whole document	1-9
A	WO 92/19078 A (COMVIK GSM AB) 29 October 1992 whole document	1-9



# INTERNATIONAL SEARCH REPORT

International Application No.

PCT/AU 96/00802

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a)

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims
2. ☒ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

### Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

# INTERNATIONAL SEARCH REPORT

## Information on patent family members

International Application No.  
PCT/AU 96/00802

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report				Patent Family Member			
WO	95/12293	AU	80638/94	CA	2174754	CN	1133667
		EP	727129	FI	961761	FR	2711866
		NZ	275131				
EP	556970	FI	920698				
WO	95/32590	AU	24108/95	FI	942215	AU	24108/95
EP	616458	JP	6-276263	US	5436969		
EP	586081	AU	44353/93	CN	1086367	EP	586081
		GB	9216475	GB	2269512	JP	7312630
WO	94/08433	EP	672328	FI	951536	NO	951231
		SE	9202847				
WO	92/19078	AU	14661/92	CA	2108155	EP	579655
		FI	934497	NO	933659	NZ	242272
		SE	9101105	EP	607265	US	5274996